



Proteja sus ojos
W ear eye protection

EN 1083-2


Specials for
brushing
welds

Especiales
para cepillado
de soldaduras



CEPILLOS CIRCULARES TRENZADOS TWIST KNOT WHEEL BRUSHES

Tratamiento de soldaduras - *Welding treatment*

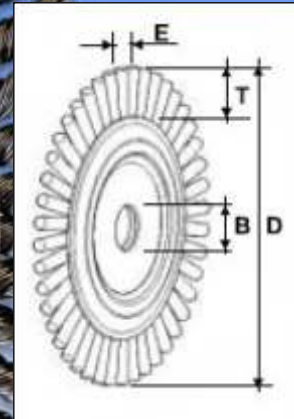

La limpieza de soldaduras es la operación clave durante la fase de montaje de los tubos. Los cepillos circulares trenzados FPL provistos con diámetro desde 115 hasta 175 mm en espesores de 9, 6 y 4 mm con gran número de trenzas, son particularmente indicados para la primera sesión de cepillado removiendo la escoria más dura en zonas de difícil acceso como los biceles.

Los cepillos trenzados FPL provistos con diámetro desde 115 hasta 200 mm en espesores de 13 mm, son indicados para la segunda sesión de cepillado.

Cleaning of the welded are considered the core operation during the pipe's layer. FPL twist knot circular brushes provided with diameter 115 up to 175 mm, 9, 6 or 4 mm thick at face and a large number of twist knots, are indicated for the first scrubbing removing hard to reach slugs.

FPL twist knot circular brushes provided with diameter 115 up to 200 mm, and 13 mm wide face, are indicated for the second scrubbing removing hard to scrub slugs.

Ø(D)	Espeor (E) Face width	Trenzas Knots	Saliente (T) Trim length	Eje (B) Bore	RPM	MSFS	Acero Steel 0,50	Acero Steel 0,80	Trenza tipo Knot type
115	9	18	25	M14 *	9000	12500	115105C9	115108C9	C
115	6	24	25	M14 *	9000	12500	115105C6		C
115	6	24	25	22	9000	12500	115105C622		C
150	9	24	33	22	7000	9000	150105C9	150108C9	C
150	9	24	33	M14 *	7000	9000	150105C9M14	150108C9M14	C
150	6	38	30	22	7000	10000	150105C638	150108C638	C
150	6	38	30	M14 *	7000	10000	150105C638M14	150108C638M14	C
150	6	44	25	22	7000	10000	150105C644	150105C644	C
150	4	58	24	22	7000	10000	150105C458		C
175	9	30	35	22 *	7000	8500	175105C9	175108C9	C
175	9	30	35	M14	7000	8500	175105C9M14	175108C9M14	C
175	6	44	30	22	7000	8500	175105C6	175108C6	C

Pronta entrega/ready for delivery

* Tuerca 5/8 opcional / request for 5/8 treated hole

Tipo de trenza / Knot type





**Especiales
para recubrimiento
de tubos**


**Specials for
pipes coating
treatment**



Proteja sus ojos
W ear eye protection


EN 1083-2

CEPILLOS CIRCULARES TRENZADOS TWIST KNOT WHEEL BRUSHES

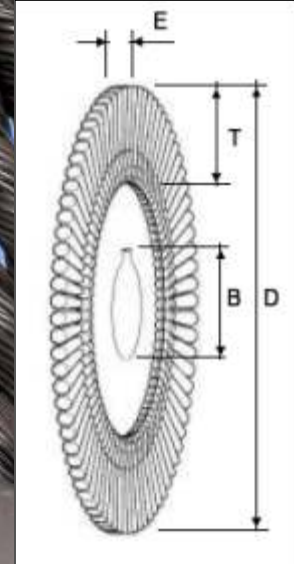

Para ésta tarea suplimos grandes cepillos circulares trenzados de acero templado, para uso individual o su ensamble en rodillos de grandes dimensiones. Estos cepillos son indicados para eliminar polietileno, polipropileno o resinas epoxi de las cabezas de tubos.

On this purpose, we supplied high quality tempered steel twist knot circular brushes, used singly or mounted in rollers of large dimension. These brushes are indicated for deburring polyethylene, polypropylene or epoxy resins from the pipe's edges.

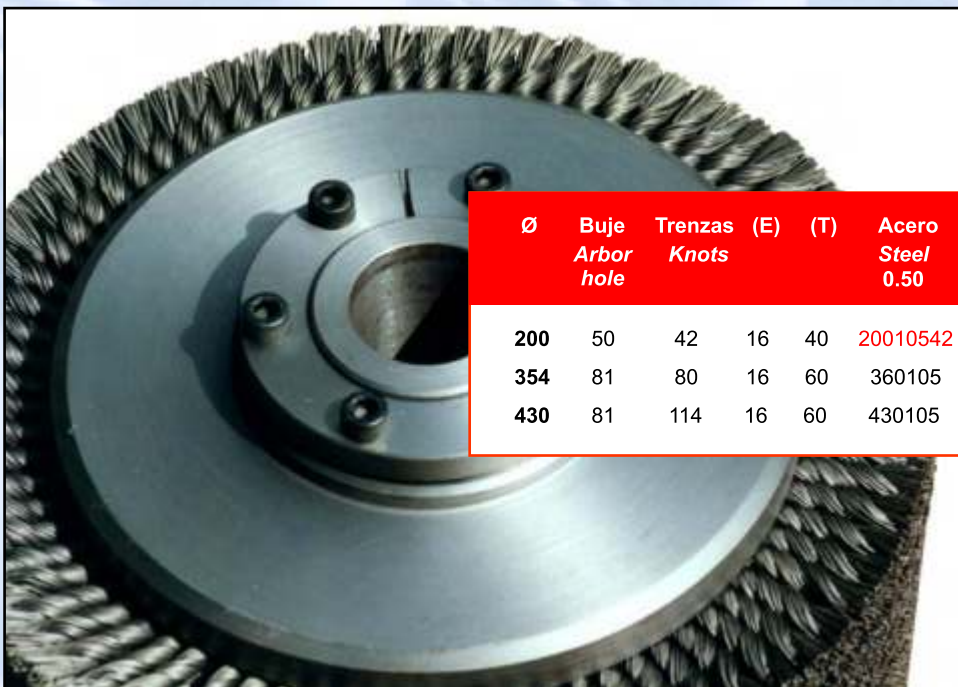

Ø	Buje Arbor hole	Trenzas Knots	(E)	(T)	Acero Steel 0.50	Acero Steel 0.80	Acero Steel 1.00	Inox. 1.00
200	50	42	16	40	20010542	20010842	20011042	
354	81	80	16	60	360105	360108	360110	360110I
430	81	114	16	60	430105	430108	430110	430110I

Pronta entrega
ready for delivery